

# MDN

- [DeployStudio](#)
- [Mac OS X OpenLDAP](#)

# DeployStudio

DeployStudio

Image not found or type unknown

Mac

OS X

Windows

DeployStudio Server

BootCamp

Linux

DeployStudio

Mac

OS X Server

Open Directory /

DeployStudio

• OS X 10.6.8+ Apple Computer

• OS X

• IP

• [DeployStudio](#)

OS X Server 10.6.8+

# DeployStudio

DeployStudio

1. DeployStudio **D**MG

**A**

Image not found or type unknown

2. " " **B** " "

**B**

Image not found or type unknown

3. " " **C** " "

**C**



4. " **D** " "

**D**




5. **E**

**E**



6. **F**

**F**



7. **G**

**G**



8. NetInstall OS X Server DeployStudio **H** NetBoot .nbi

**H**



9.



DeployStudio

1. DeployStudio

**a DeployStudio Admin**


**b DeployStudio Assistant**

NetBoot

DeployStudio

**c DeployStudio RuntimeJ**

**J**



2. DeployStudio Assistant.app

K

DeployStudioServer

K

Image not found or type unknown



3. DeployStudio Server

L


Image not found or type unknown



4. OFF MMON" ON


M

Image not found or type unknown



N

Image not found or type unknown



5. DeployStudio

O

Image not found or type unknown



6. P IP DeployStudio

P

Image not found or type unknown



7. DeployStudio DeployStudio

Q

Image not found or type unknown



8. DeployStudio DeployStudio

R

Image not found or type unknown



9. S #10

S

Image not found or type unknown



10. T T



11.

DeployStudio

SSL

SSL

U



12.

IT



13.

DeployStudio

#1W

DeployStudio

W



14.

DeployStudio

MAC



15.

Y

DeployStudio

Y



16.

Z

DeployStudio


Z




DeployStudio

DeployStudio

# Mac OS X OpenLDAP

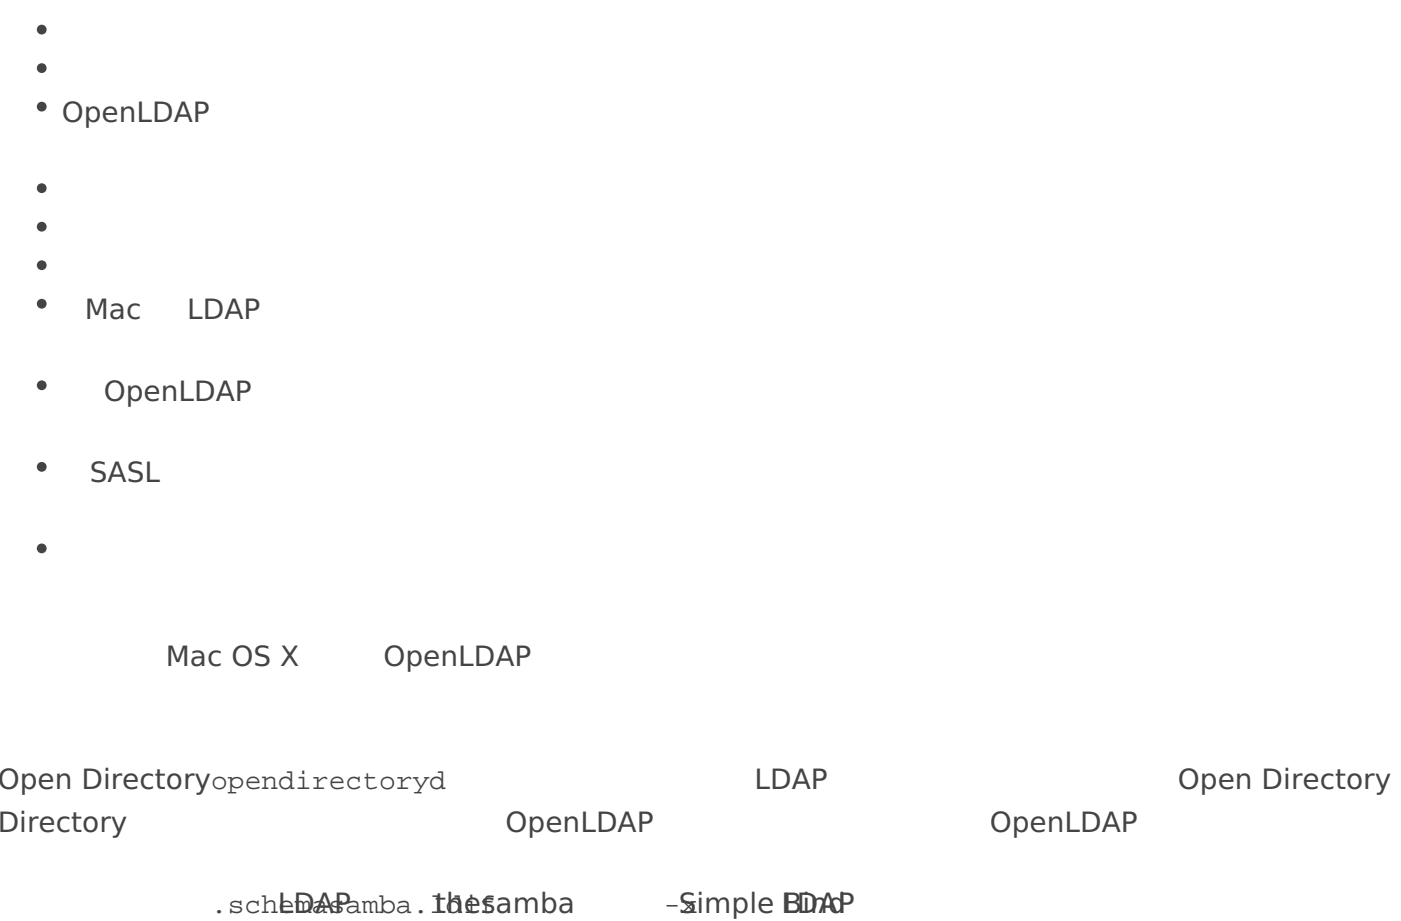

## OpenLDAP

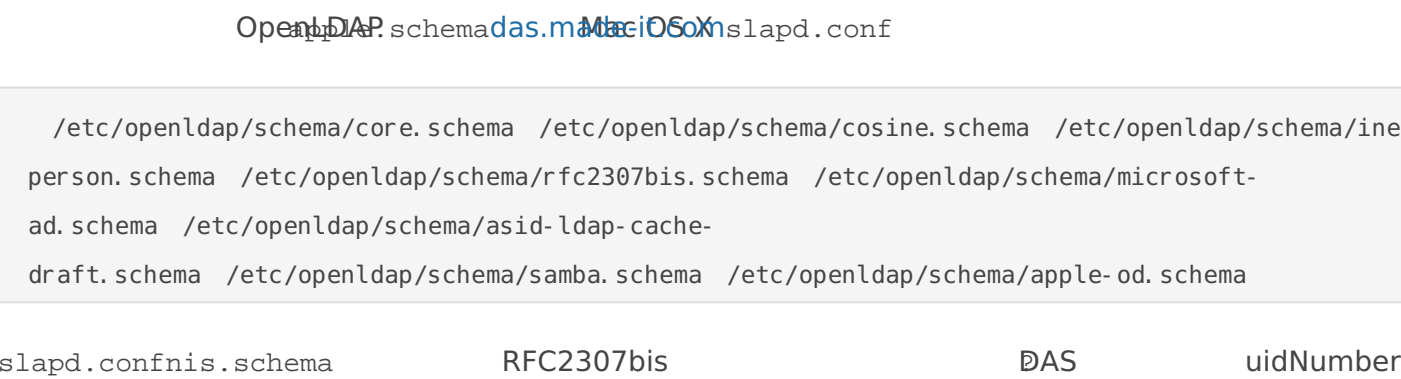

```
attrs=userPassword sambaNTPassword sambaLMPassword dn="cn=manager,dc=example,dc=com" write
```

Mac

```
attrs=userPassword sambaNTPassword sambaLMPassword dn="cn=manager,dc=example,dc=com" write
peername.ip=192.168.1.0%255.255.255.0 read *
```

```
dn ou=macosxodconfig,ou=apps,dc=example,dc=comou macosxodconfigobjectClass objectClass
```

# Mac LDAP

## OpenLDAP

“ ” “ ” “ ” “ ...”

image not found or type unknown



LDAP FQDN IP

image not found or type unknown



SSL

LDAP

image not found or type unknown



```
sudo ls / / /OpenDirectory/ /LDAPv3/
```

server-name.plist

“ ” “Web” “ ” ...”  
Image not found or type unknown

...  
Image not found or type unknown

LDAPv3 LDAP RFC2307  
Image not found or type unknown

LDAP

```
dscl localhost - /LDAPv3
```

```
dscl localhost -list /LDAPv3/<ldap-server>/
```

SearchPath

```
dscl / -read / CSPSearchPath
```

/etc/auto\_master /home

```
killall autofs
```

LDAP

```
su - <LDAP-user>pwd
```



```
sudo rm /Library/Preferences/OpenDirectory/DynamicData/LDAPv3/<ldap-server>.plist
```

# SASL

Mac OS X 10.7.2    Open Directory    SASL    OpenLDAP    OpenLDAP    Simple Bind Lion

Wireshark    Mac    ?objectclass=\*&?SASLMechanismdefaultNamingContext  
schemaNamingContextsalRealm

ldapsearch??SASLMechanisms

```
# ldapsearch -x -h localhost -b '' -D "cn=manager,dc=example,dc=com" -y /etc/secrets/ldap-  
manager.secret -s base -LLL "(objectclass=*)" SASLMechanisms
```

SASL    DIGEST-MD5    SASL    GSSAPI    SASL    CRAM-MD5    SASL    NTLM

Mac    ~~Mac/ldap~~    LDAP

```
/usr/libexec/PlistBuddy -c "add ':module options:ldap:Denied SASL Methods:' string DIGEST-  
MD5"  
/Library/Preferences/OpenDirectory/Configurations/LDAPv3/yourldapserver.plist0pendirectoryd.pl  
ist
```

Image not found or type unknown



...

" "


Open Directory

LDAPv3

Open Directory

DLAP

Image not found or type unknown



inetOrgPerson posixAccount shadowAccount apple-user

posixGroup apple-group

...

LDIF

```
dn ou=macosxodconfig,ou=apps,dc=example,dc=com < file:///home/admin/Documents/Templa
```

DN

```
ldapmodify -x -h ldap.example.com -D "cn=manager,dc=example,dc=com" -W -f macosxodconfig.ldif
```

Template.plist      LDAP

LDAP      From Server      RFC2307

image not found or type unknown



image not found or type unknown

